


## TYPE SV-FL

### Flat Strip Soffit Ventilator

- Flat and sloping roof applications
- 25,000mm<sup>2</sup> airflow rating
- Self coloured – corrosion proof
- Insect screening



#### Solution

The Type SV-FL is a strip soffit ventilator designed for use with flat and sloping soffit and has an airflow rating of 25,000mm<sup>2</sup> per metre run. Thus it may be used where the roof pitch is below 15 degrees.


The ventilation slots provide screening in accordance with regulations.

#### Bill of Quantity / Specification Wording

##### 900 Eaves Soffit Ventilators

Type SV-FL Flat Soffit Strip by Cavity Trays of Yeovil Somerset BA22 8HU (01935 474769). Colour \_\_\_\_\_. Secure to soffit and fascia. Metres run \_\_\_\_\_.


<b>Product name</b>	Type SV-FL Soffit Ventilator for Flat Roofs
<b>Size</b>	2400 x 80mm
<b>Free airflow rating</b>	25,000mm <sup>2</sup> per running metre pitches under 15°
<b>Colour</b>	White Brown
<b>Material</b>	PVCU
<b>Predrilled fixing holes</b>	Invert to use at top or bottom of sloping soffit

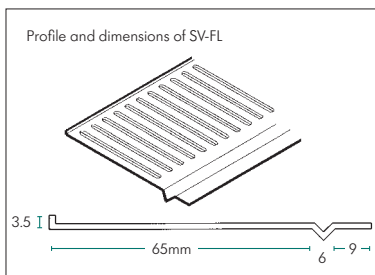

## TYPE SSV-GP

### Soffit Ventilator - general purpose

- For sloping and flat roof ventilation
- 25,000mm<sup>2</sup> airflow rating
- Self coloured - corrosion proof
- Insect screening



#### Solution

The Type SSV-GP is a general purpose soffit ventilator strip, with an airflow rating of 25,000mm<sup>2</sup> per metre run. In sloping applications it may be used where the roof pitch is below 15 degrees.

The Type SSV-GP may also be used to ventilate flat roofs, necessitating the fascia to be fitted so it stands off the masonry face a distance of just 70mm. The ventilation slots provide screening in accordance with regulations.

#### Bill of Quantity / Specification Wording

##### 900 Eaves Soffit Ventilators

Type SSV-GP General Purpose Soffit Ventilator by Cavity Trays of Yeovil Somerset BA22 8HU (01935 474769). Colour \_\_\_\_\_. Secure to soffit and fascia. Metres run \_\_\_\_\_.

<b>Product name</b>	Type SSV-GP General Purpose Strip Ventilator
<b>Size</b>	2400 x 70 x 20mm
<b>Free airflow rating</b>	25,000mm <sup>2</sup> per running metre pitches under 15°
<b>Colours</b>	White Brown
<b>Material</b>	PVCU
<b>Observations</b>	Predrilled fixing holes

