
## Specifications

Product name - group	Cavi 120 Type PC Lofthatch	
	Trimmed joists + prep	
Dimensions	Trim to 775mm x 560mm then line with p/b or fire	
	board to 755m x 540mm	
	745 500	
Clear opening size	745mm x 530mm	
Al li li ii	V	
New work applications	Yes	
D . C. I	Yes	
Retrofit applications	Yes	
Material	Frame and door Polyurethane fr	
Material	Seals Electro galvanized steel	
	M4 11 PAL 2022	
Colour	White RAL 9010	
Extrudes / compresses under	N/A	
load	N/A	
Pack size	Available individually	
Pack size	Available individually	
CFC	CFC Free	
CFC	CFC Free	
ODP	7ero	
ODP	Zero	
Regulation compliance	Yes BS 476 Pt 22 – 1987	
regulation compilance	163 03 470 11 22 - 1707	
CAD downloads	Yes	
CAD downloads	103	
	Downward opening door is detachable should its	
Design considerations	removal be required to aid entry of apparatus into or out of the roof space.	

## **CAVI120 TYPE PC LOFTHATCH**

## Loft Access Door

- Two hour fire integrity rating
- Integral latch
- White stove finish
- Insulated door

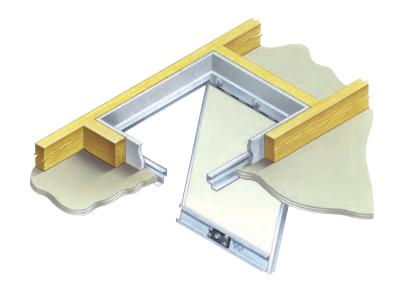


Use

To provide access with a fire integrity rating of two hours into a roof space.







Solution ——————————	
The prefix of Cavi 120 denotes this Lofthatch has a fire integrity rating of 120minutes. The downward opening door is supported on a full width zinc coated hinge that provides retention across the entire width of the frame.	
The door is secured in the closed position by turning an integral locking bolt accessed via a recessed locking point. Draught strips within the frame compress against the door when locked. The dished steel constructed door retains a fire barrier layer.	
When installed the 1.5mm thick frame surround appears almost flush with the ceiling plaster so visual presence is minimised.	
Designers' Comments —	
Design of this product formalized following reference to BRE Digest 262/270. NHBC 7.7. Guide to Good Practice. BS476.	
Bill of Quantity / Specification Wording —	
Cavi 120 Type PC Lofthatch with two hour fire integrity rating	
Manufacturer: Cavity Trays Ltd, Yeovil Somerset BA22 8HU Tel: 01935 474769	
Incorporate within trimmed ceiling joists following lining of trimmed surround and fixing in accordance with manufacturers instructions. Number	
Notes:	



