


TYPE EROV 400

Eaves Roll-out Ventilator

- New and existing work applications
- Maximum free airflow 30,000mm² per metre
- Suitable for all popular truss centres
- Easy regulation compliance



Solution

The Eaves Roll-Out Ventilator is manufactured in PVCU. The cross corrugations permit this product to be supplied in long rolls which are then uncoiled on site across the trusses in the appropriate position. Nails are then used to secure the roll in position.


The result is an evenly spaced air route along the eaves, providing ventilation in accordance with the Building Regulation requirements.

Bill of Quantity / Specification Wording

900 Eaves Ventilators

Type EROV Eaves Roll Out Ventilator by Cavity Trays of Yeovil Somerset BA22 8HU (01935 474769). Colour black. Locate and secure to roof timbers at all eaves. Metres run _____.

Product name	Type EROV Eaves Roll-Out Ventilator
Size	Rolls open to cover 6m x 400mm wide
Free airflow rating	30,000mm ² per running metre maximum
Colour	Black
Material	Lightweight PVCU
Observations	For all roof pitches. Elongation dictates performance

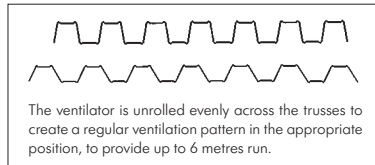

TYPE OEVWF

Open Eaves Ventilator with flyscreen

- For open-eaves and non-fascia applications
- Integral fly screening
- All roof pitches accommodated
- Easy regulation compliance
- 10,000mm² rating and 25,000mm² rating



Solution

Preformed lightweight ventilator with punched flyscreen.

May be used in new build and re-roofing projects with an open eaves detail (no infilling soffit board).

Available with a 10mm airflow rated punched edge - OEVWF 10

Available with a 25mm airflow rated punched edge - OEVWF 25

Please note the 25mm rated ventilator has a different appearance than the other rated models.

Bill of Quantity / Specification Wording

900 Eaves Ventilators

Type CRSV Circular Soffit Ventilator by Cavity Trays of Yeovil Somerset BA22 8HU (01935 474769). Colour _____. Build into circular holes cut in soffit at specified centres Number _____.

Product name	Type OEVWF Open Eaves Ventilator + Flyscreen	
Size to suit truss centres	400mm	400 x 435-OEVWF 10
	450mm	450 x 435-OEVWF 10
	600mm	600 x 435-OEVWF 10
	600mm	600 x 435-OEVWF 25
Free airflow rating	10,000mm ² per running metre 25,000mm ² per running metre	
Colour	Black	
Material	Lightweight rigid PVCU	
Observations	For roof pitches of 15 degrees and above	

